

2442 Primary Jaw Plant




The ELRUS 2442 125 HP Primary Jaw Plant is transportable without disassembly and extremely versatile; suitable for any crushing job! An excellent choice for the contractor who needs big jaw performance in a portable, easy to move package. It features:

- 14' Travel Height (with grizzly removed)
- 48" x 18' VGF with integral motor mount
- Hydraulic jaw adjustment (full hydraulic adjustment and tramp iron protection available)
- 48" hydraulic raise/lower discharge conveyor
- H.D. Tri-axle walking beam suspension
- Hydraulic chassis levelling
- Impact bed under jaw and bypass chute


Options available:

- Available in diesel power,
- Hydraulic side dump grizzly with adjustable bars
- Variable speed frequency control.

2442 General Arrangement

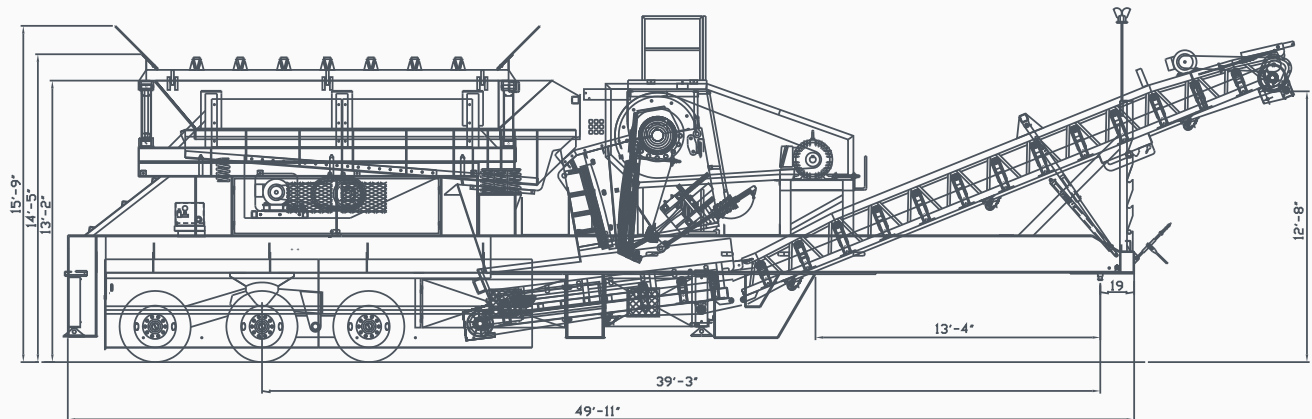

ELRUS 2442 Jaw Plant General Arrangement

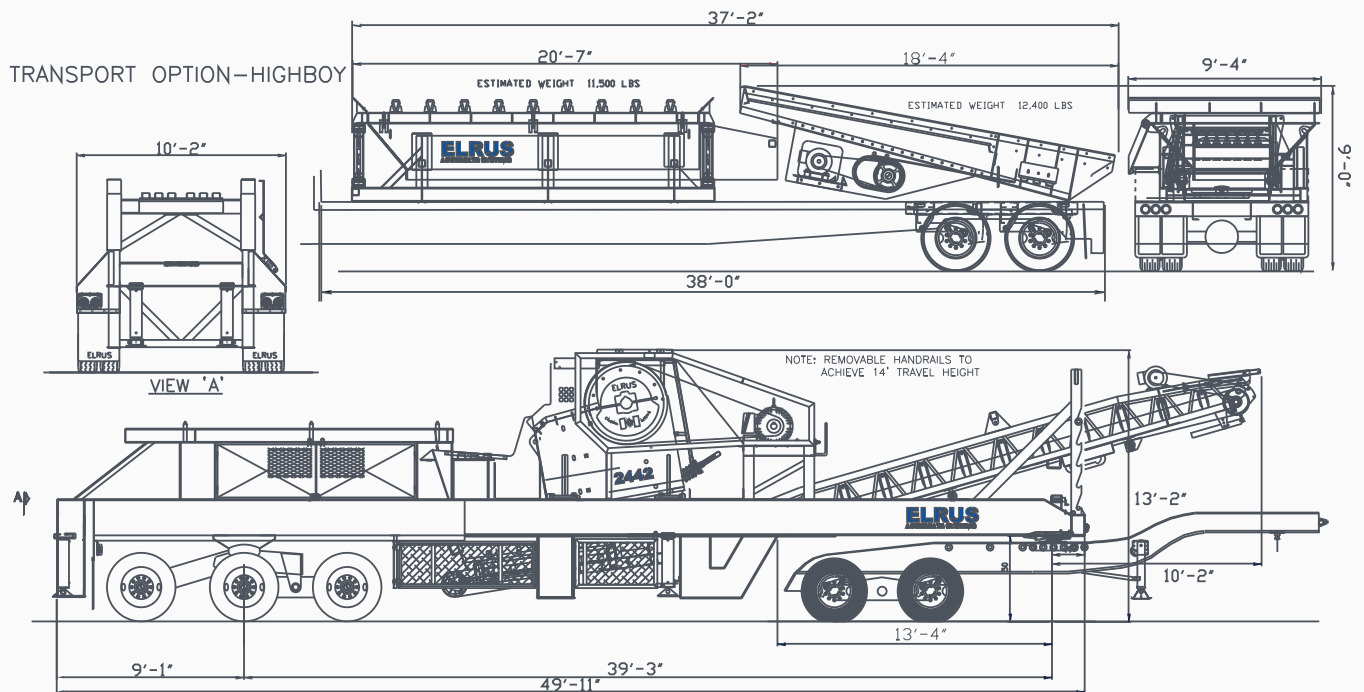

ELRUS 48"x 18' VGF
ELRUS 2442 JAW
48" DISCHARGE CONVEYOR

AXLE WEIGHTS (SINGLE AXLE JEEP)
STEERING 5100 KG
DRIVES 14390 KG
JEEP 7080 KG
TRI 20640 KG

AXLE WEIGHTS (TANDEM AXLE JEEP)
STEERING 5080 KG
DRIVES 10900 KG
JEEP 11380 KG
TRI 20720 KG

ELRUS 2442 Jaw Plant Travel Dimensions